

FIG. 2

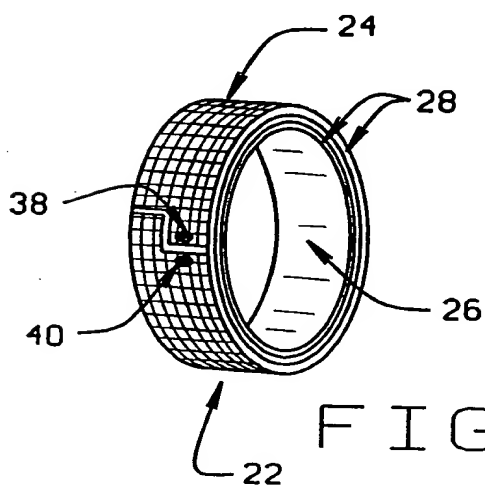


FIG. 3

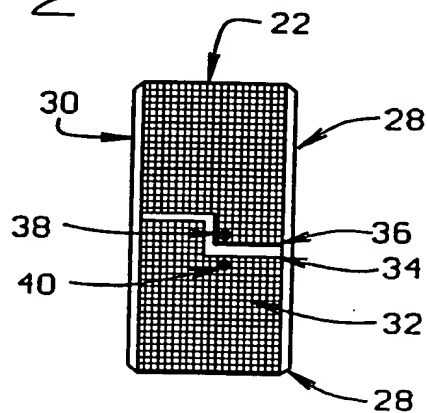
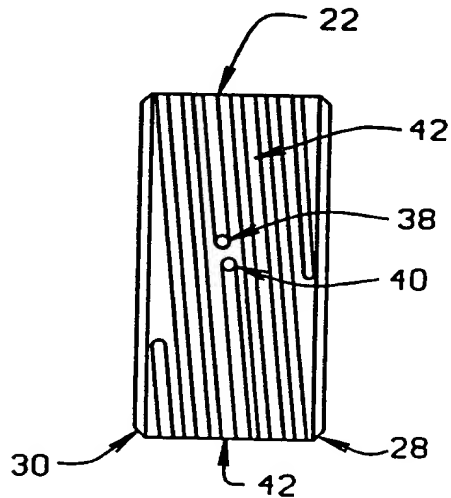
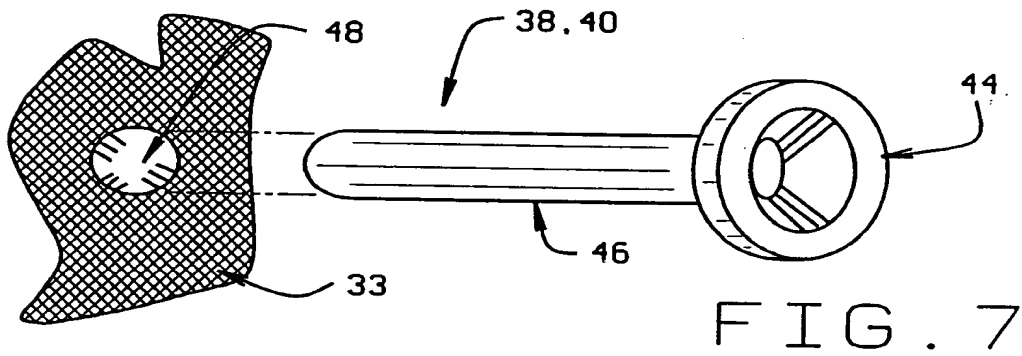
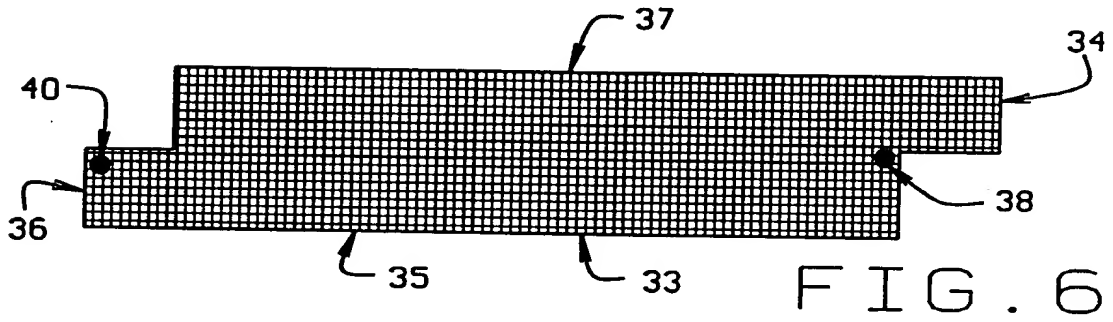
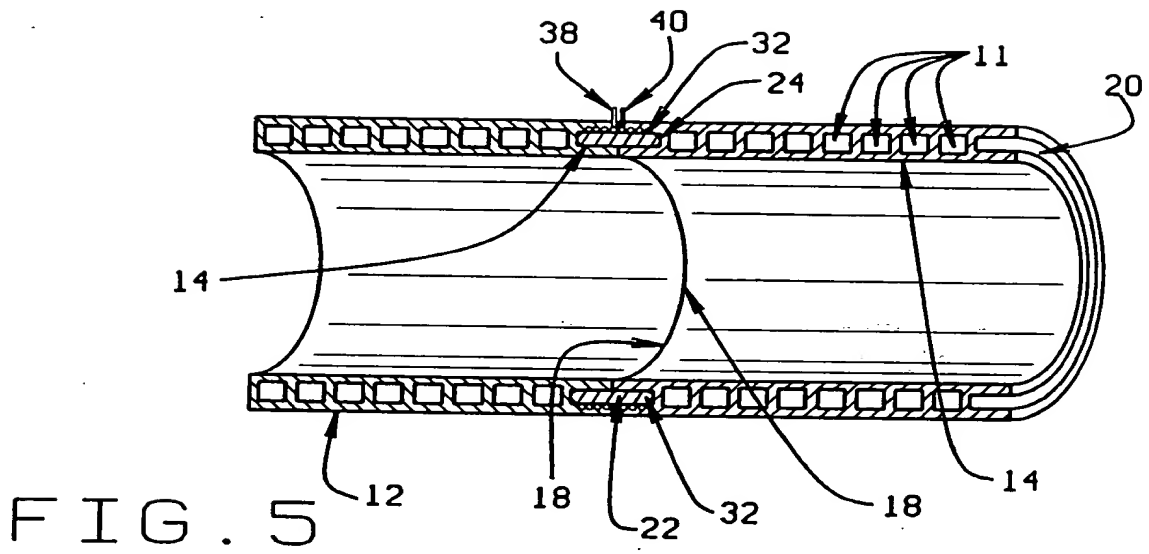


FIG. 4



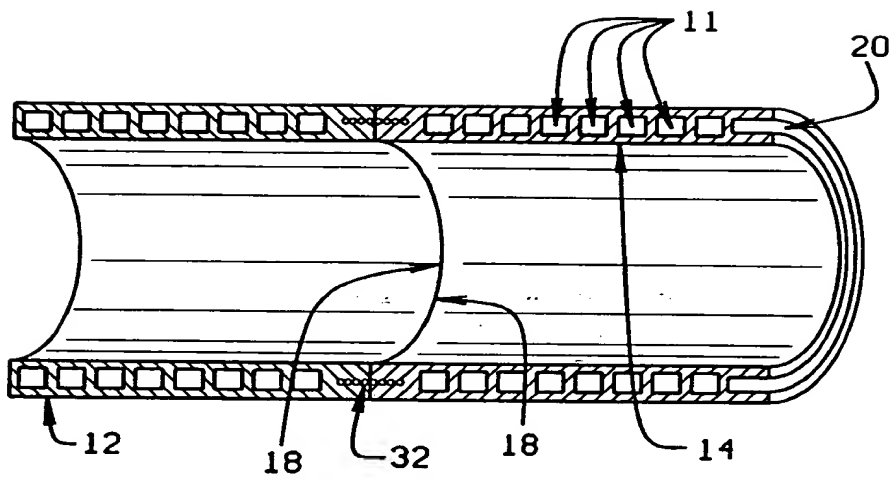


FIG. 9

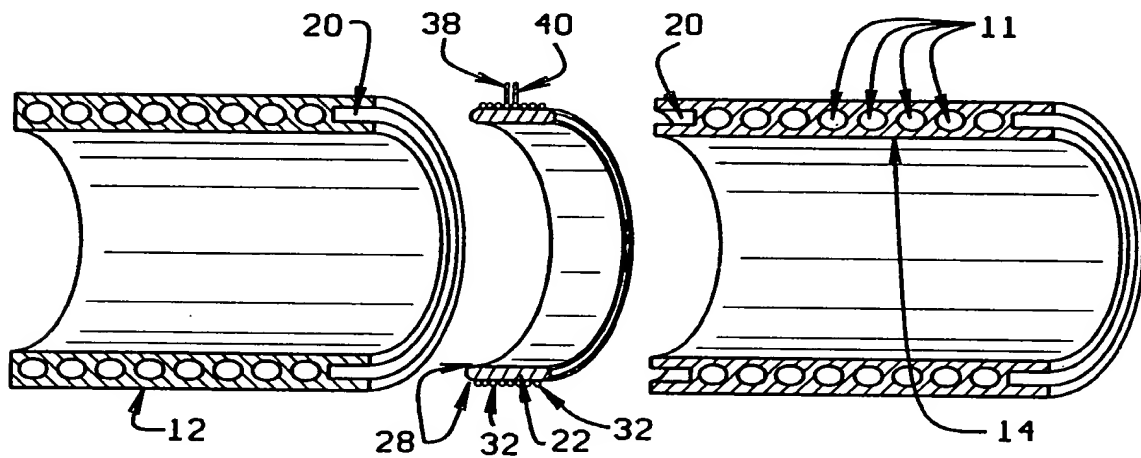


FIG. 10

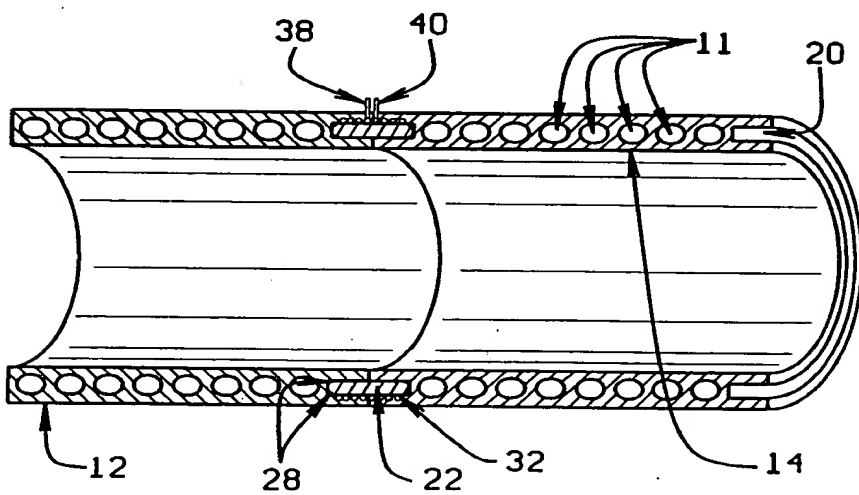


FIG. 11

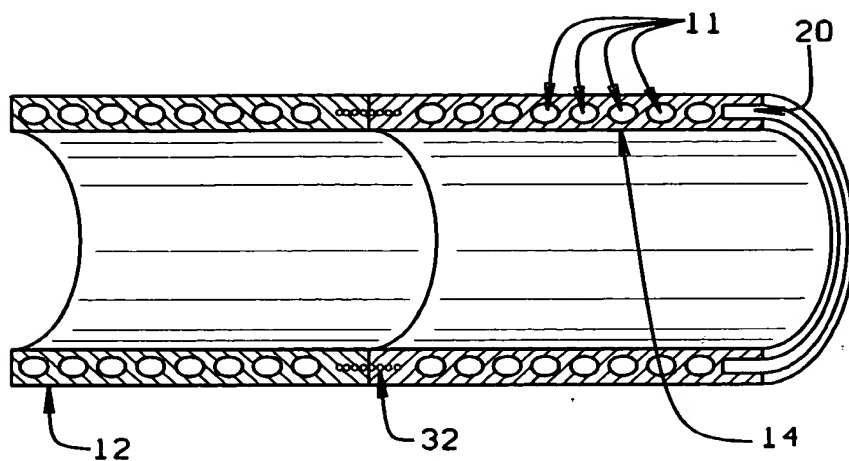


FIG. 12

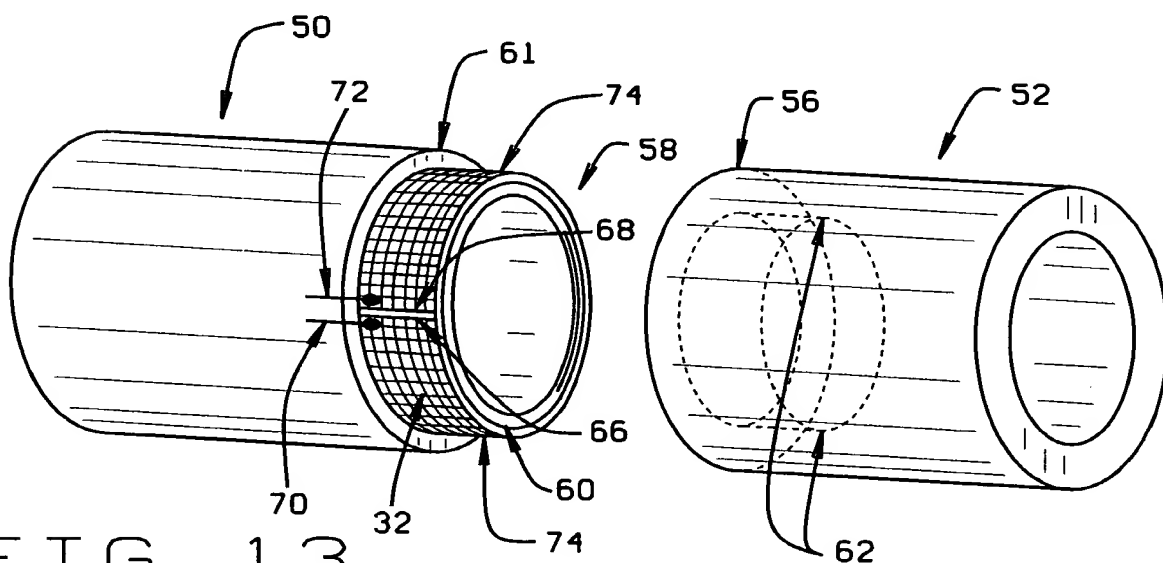


FIG. 13

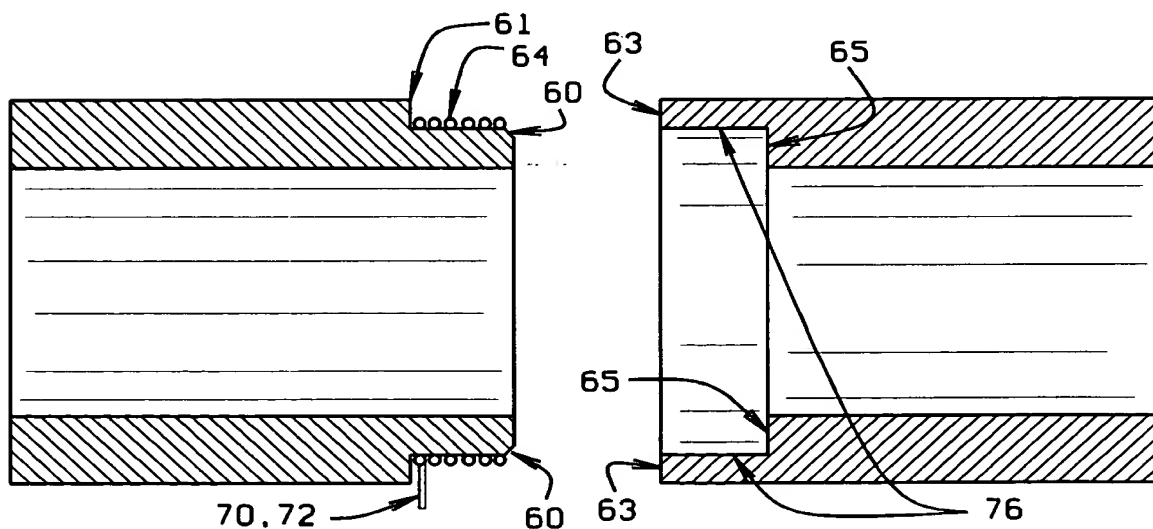


FIG. 14

0084533 06190  
T06T90" E2548860

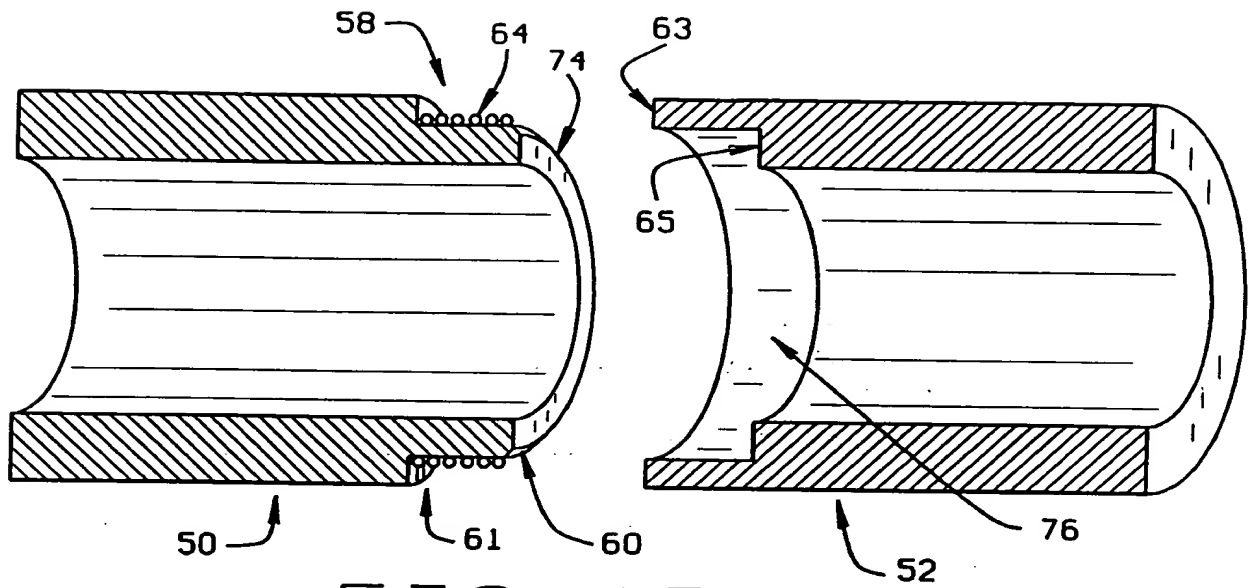


FIG. 15

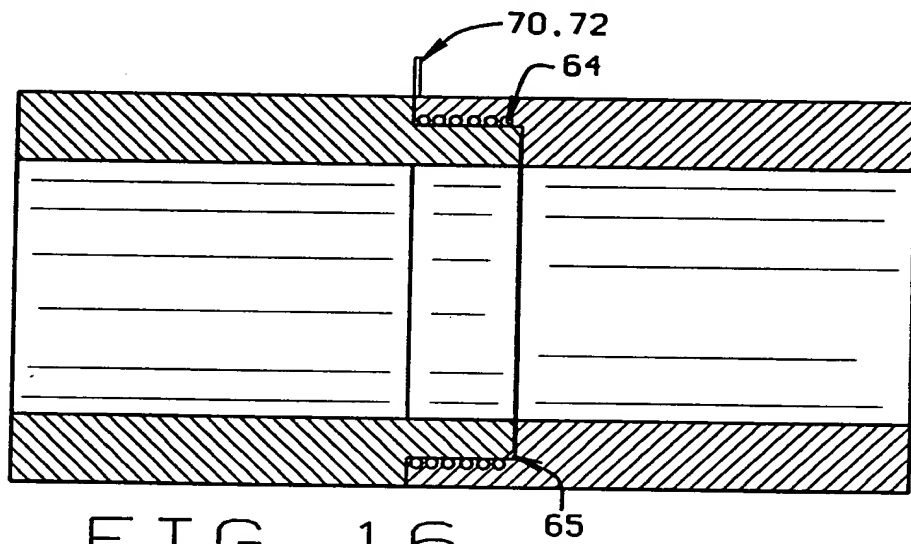


FIG. 16

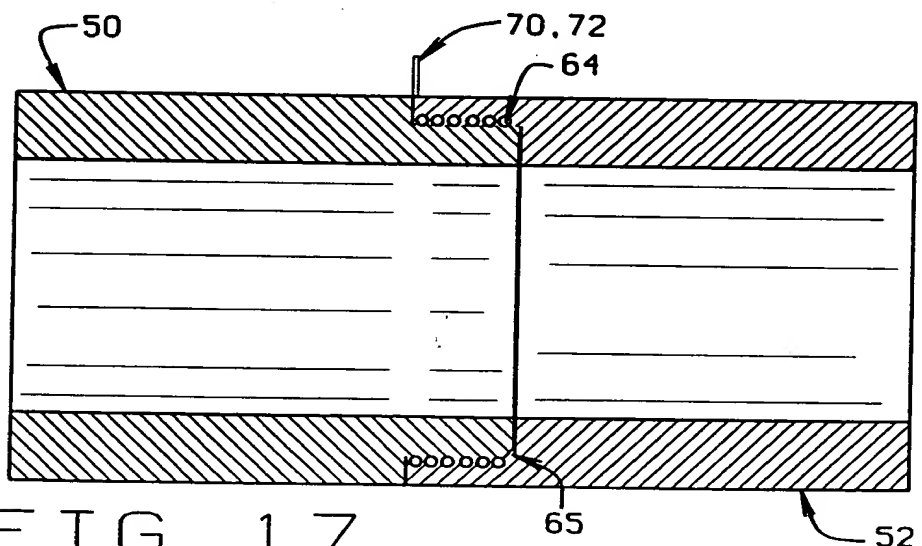


FIG. 17

A cross-sectional view of a cylindrical device. It features a central core 88, an inner layer 90, and an outer layer 92. A small protrusion 94 is located on the top surface, and a small notch 96 is located on the bottom surface.

[illegible]

FIG. 20

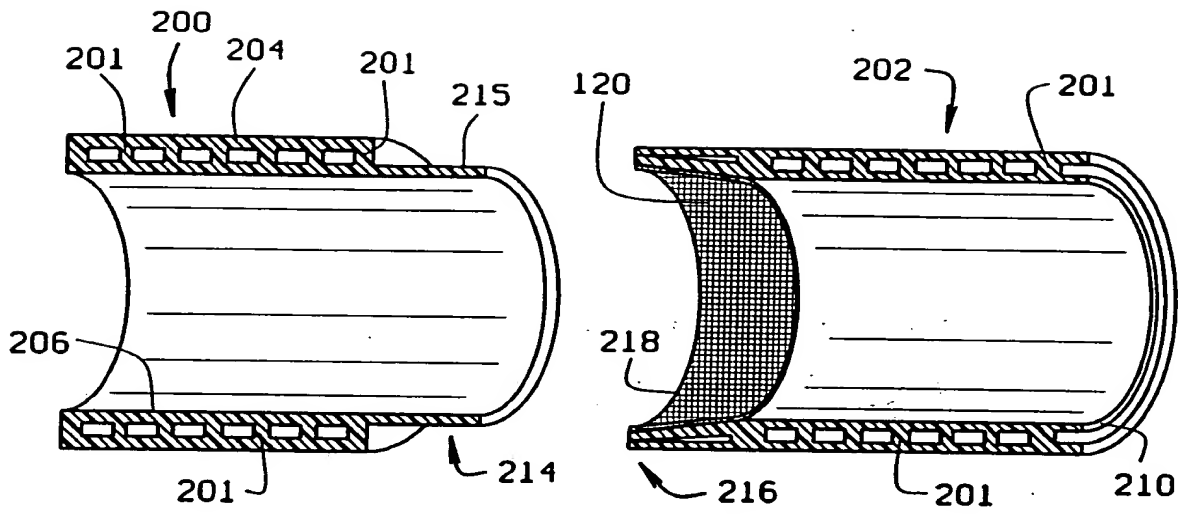


FIG. 21

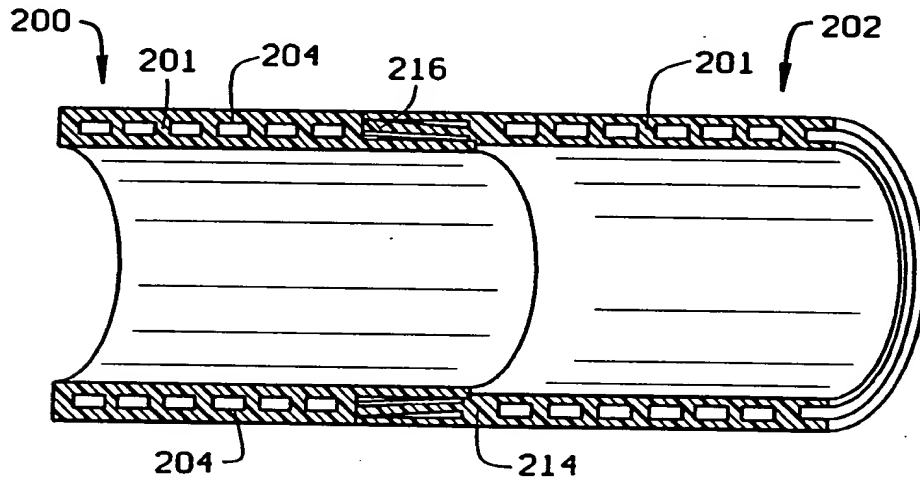


FIG. 22

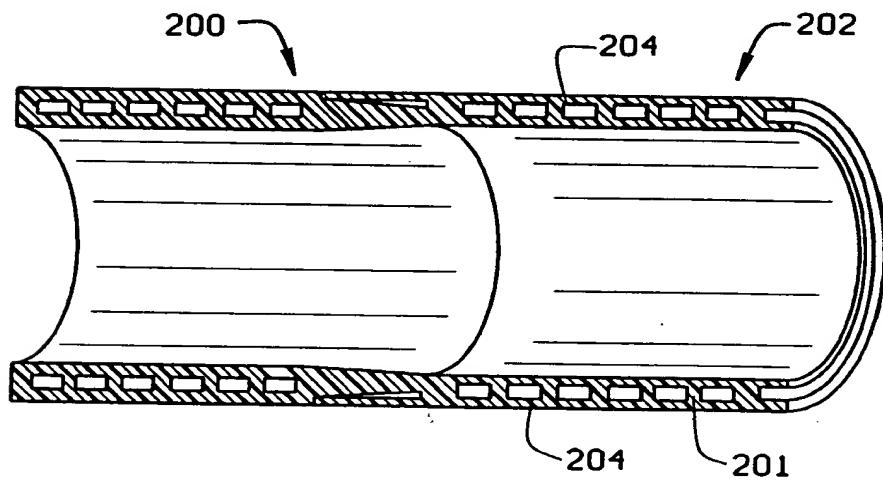


FIG. 23

FIG. 21

00453 06548860

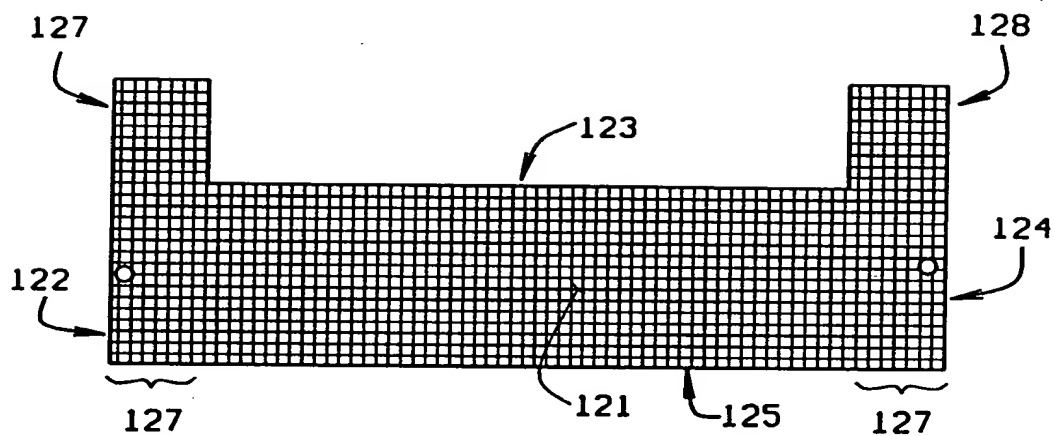


FIG. 24

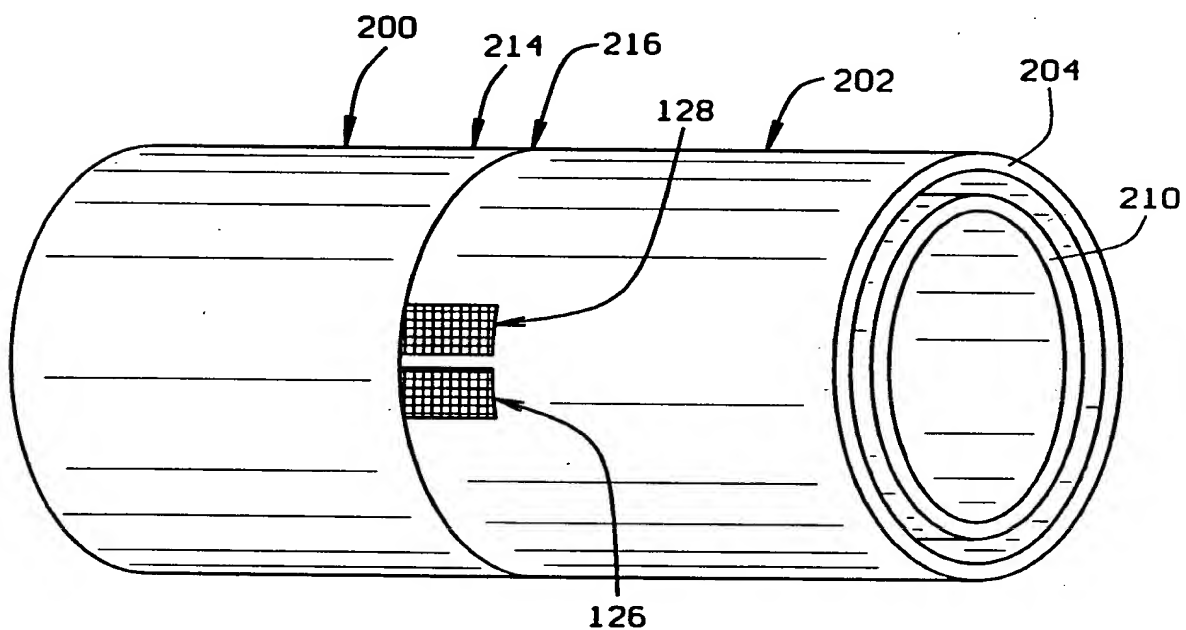


FIG. 25



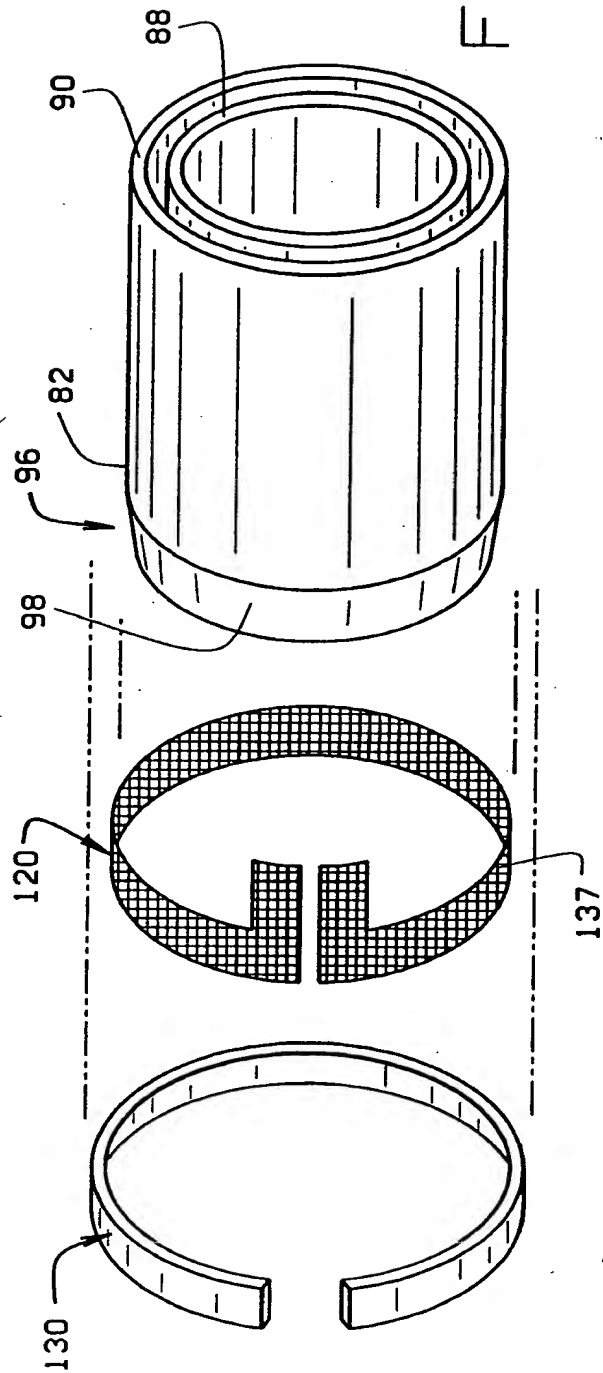


FIG. 26

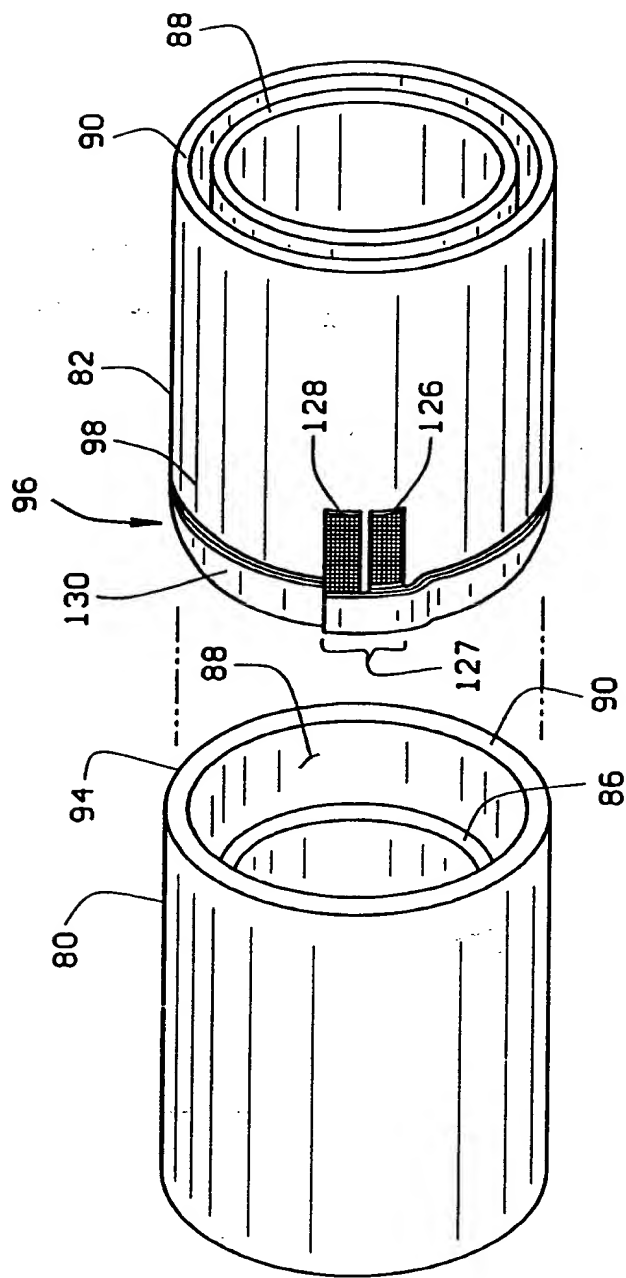


FIG. 27

FIG. 28

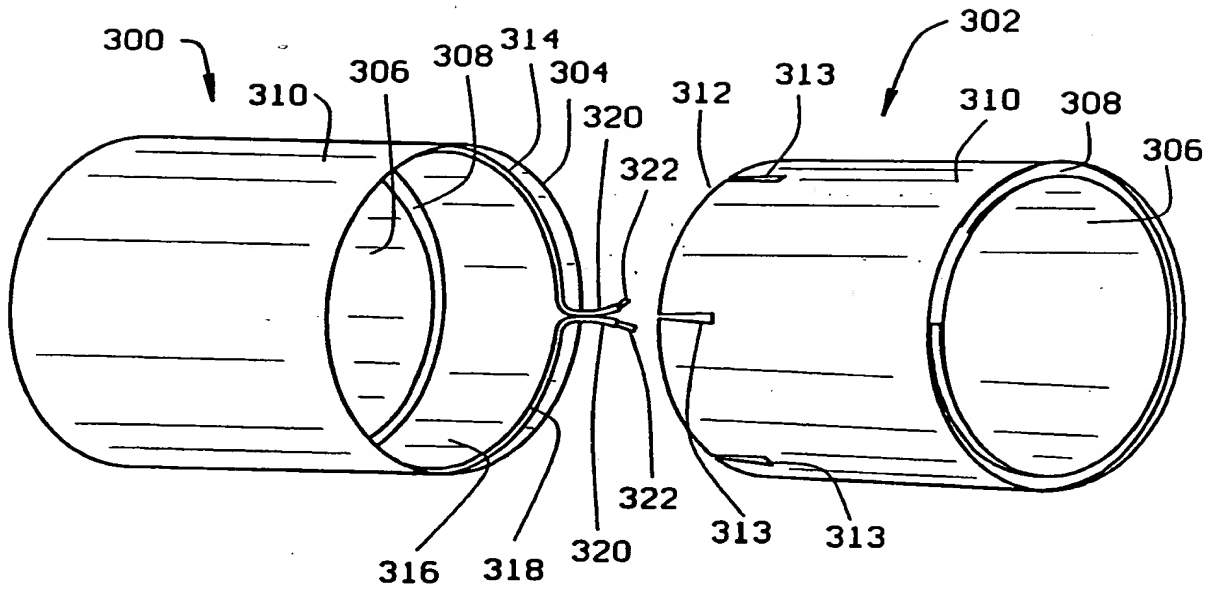


FIG. 28

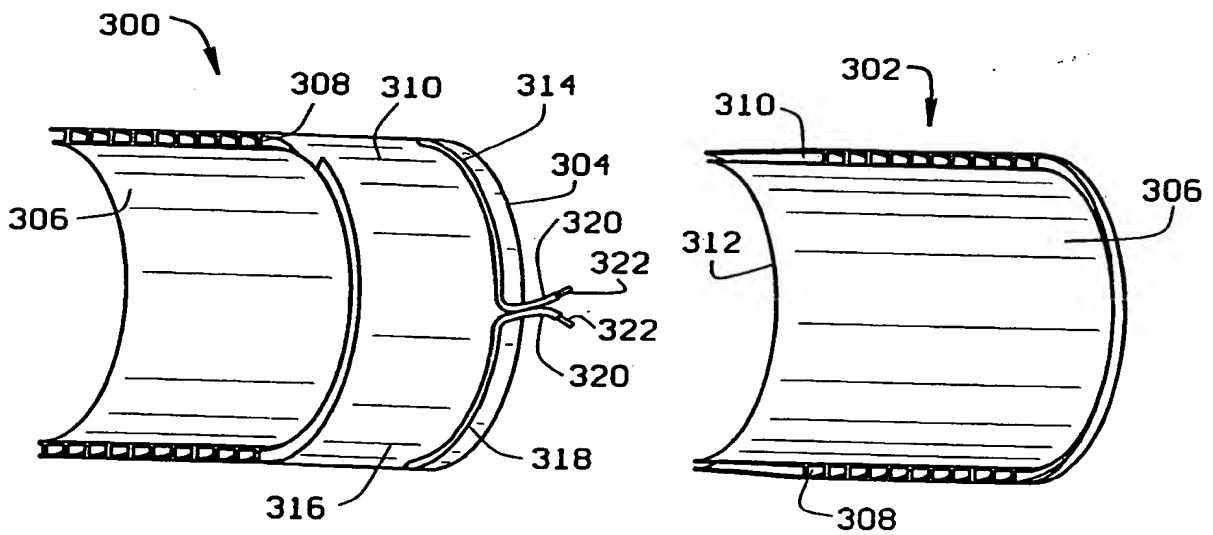
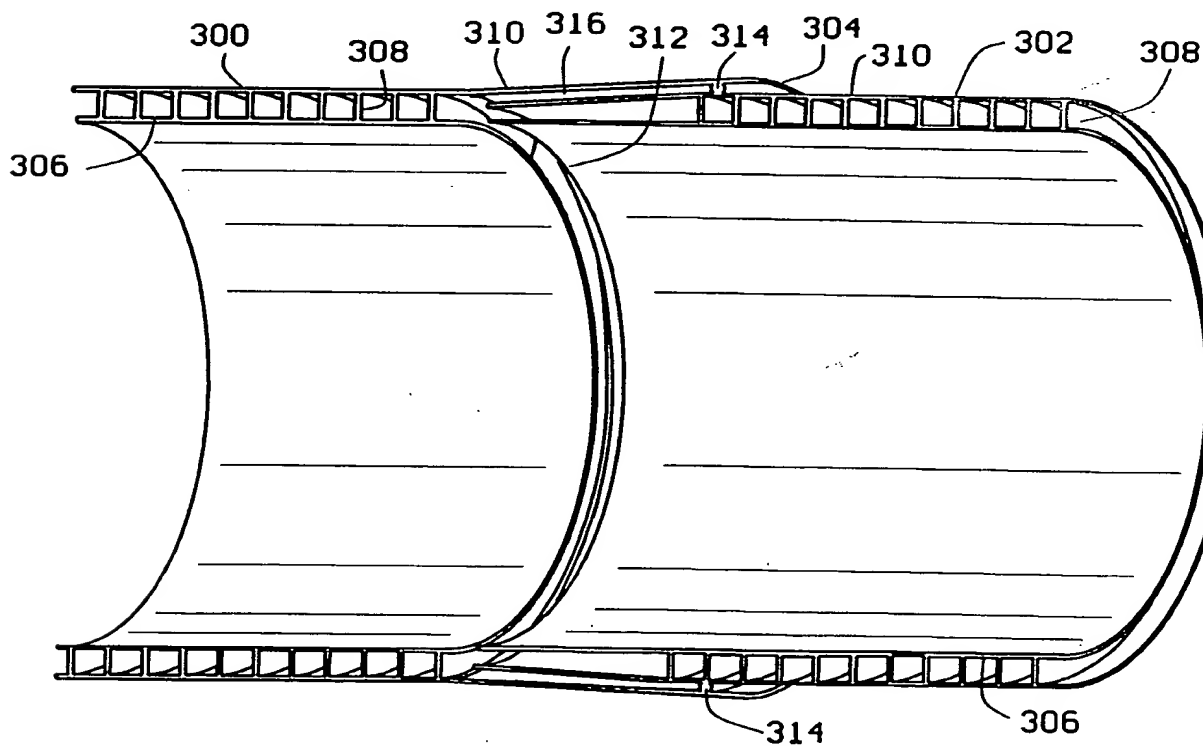
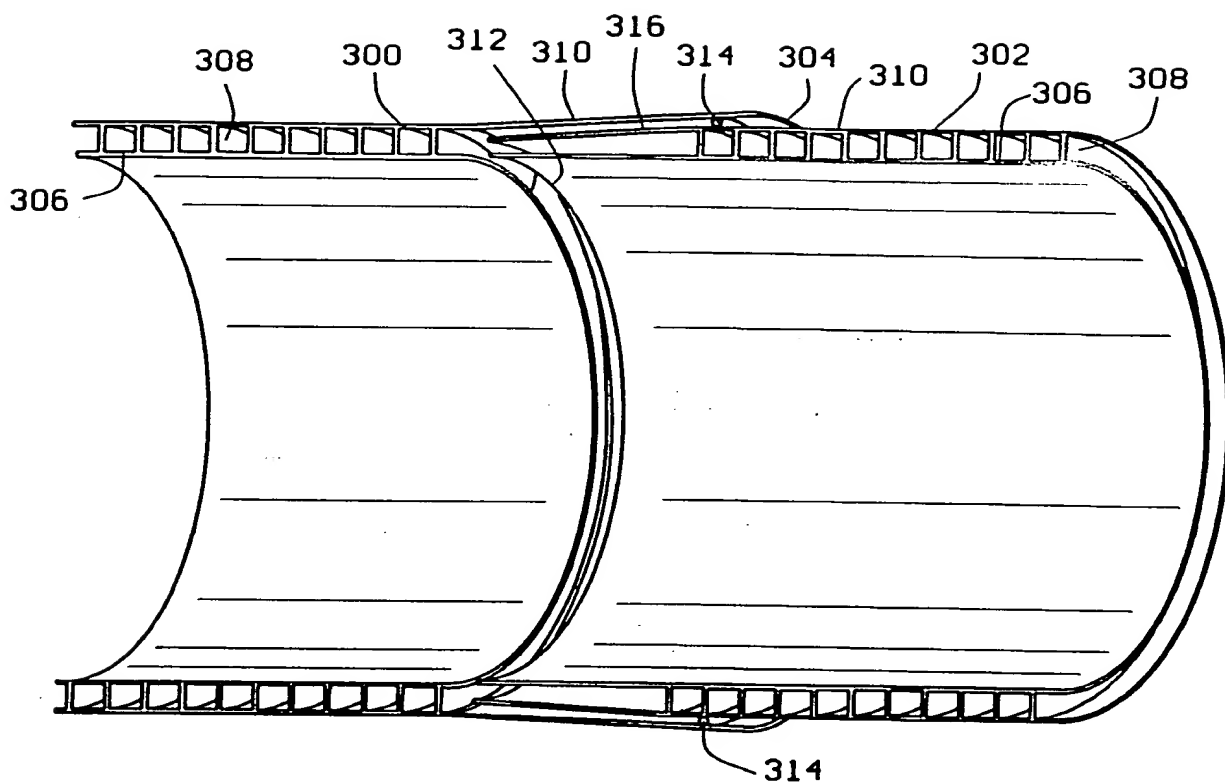


FIG. 29

0984533 061901



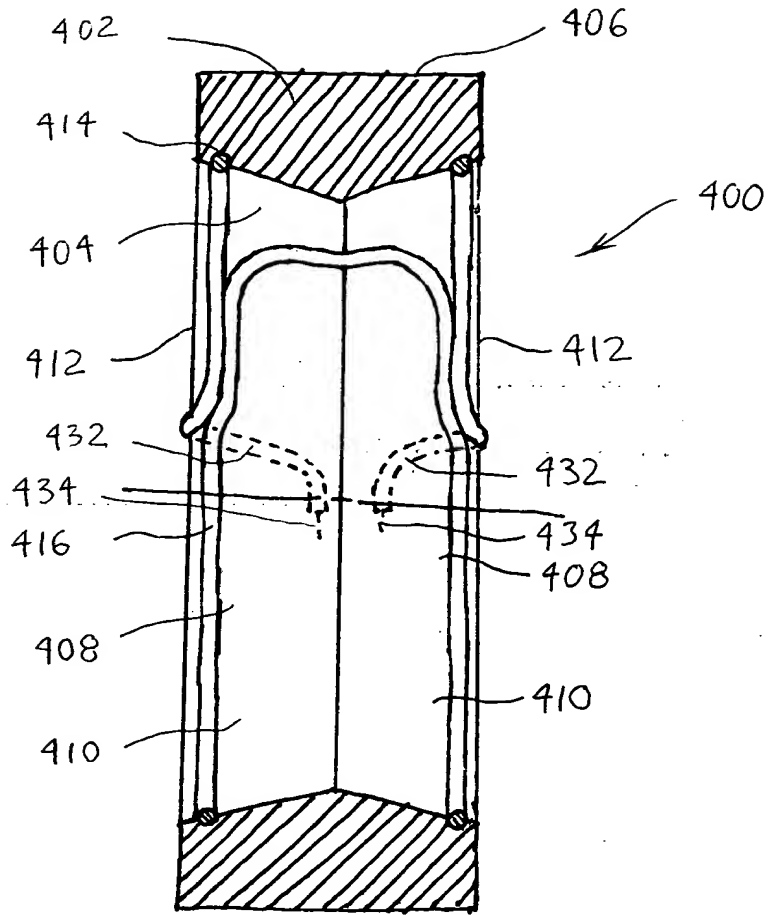


FIG 32

09884533-061901

